

# GAMMA 1 S




## Spherical array slave element

- > Ultra precise audience coverage
- > 30° unitary up 360° by coupling 12 cabinets
- > 60° asymmetric vertical coverage
- > Point source radiation with smooth polar response
- > To be used with ArphoniA amplified controllers
- > Advanced DSP, factory and user presets
- > Psychoacoustics dynamic filters
- > Flat amplitude and phase response

Usable bandwidth (-10dB)	50 Hz to 20 kHz
Maximum peak SPL at 1m	137 dB SPL
Nominal coverage (-6dB)	30°H x 10°V <sub>up</sub> x 50°V <sub>down</sub>
Components	1x 15" weatherproof transducer 1x 1.4" throat neodymium driver
Nominal impedance	8 Ohms LF, 16Ohms HF
AES power	500W LF, 150W HF
Cabinet	18mm birch plywood with internal braces, 2x integrated handles
Finish	Grey, impact resistant structured water coating
Protection grill	Black acoustically transparent perforated steel, 2mm thick, with internal dust protective foam
Connectors	2x NL4 linked
Classification	IP54
Rigging	4x M8 inserts for rigging part
Net unit weight	40 kg 88 lb
Gross weight, packed	44 kg 97 lb

Drawings mm [inches]

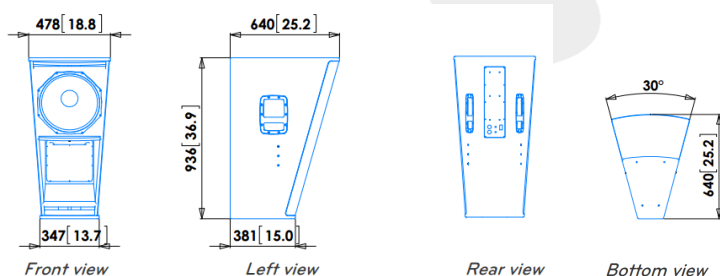

ARPHONIA  
COLLECTION