




## GAMMA 3 S

### Spherical array slave element

- > Ultra precise audience coverage
- > 20° unitary up 360° by coupling 18 cabinets
- > 90° coverage on non coupling plane
- > Point source radiation with smooth polar response
- > To be used with ArphoniA amplified controllers
- > Advanced DSP, factory and user presets
- > 8 rigging points
- > Optional multifunctional bracket

<b>Usable bandwidth (-10dB)</b>	45 Hz to 20 kHz
<b>Maximum peak SPL at 1m</b>	134 dB SPL
<b>Nominal coverage (-6dB)</b>	90°H x 20°V (coupling angle)
<b>Components</b>	1x 15" weatherproof transducer 1x 1.4" throat neodymium driver coaxially mounted
<b>Nominal impedance</b>	8 Ohms LF, 16 Ohms HF
<b>AES power</b>	500 W LF, 150 W HF
<b>Cabinet</b>	18mm birch plywood with internal braces 2x integrated handles
<b>Finish</b>	Grey, impact resistant structured water coating
<b>Protection grill</b>	Black acoustically transparent perforated steel, 2mm thick, with internal dust protective foam
<b>Connectors</b>	2x NL4MP linked
<b>Classification</b>	IP54
<b>Rigging</b>	2x M8 inserts for bracket, 7x M6 inserts for rigging parts
<b>Net unit weight</b>	28 kg 62 lb
<b>Gross weight, packed</b>	32 kg 71 lb

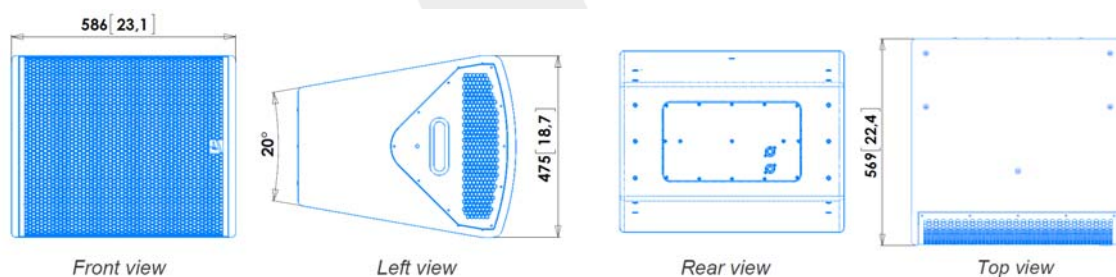

Drawings mm [inches]

ARPHONIA  
COLLECTION