

ALPHA 3 A WF




Ultra wide coverage coaxial self powered loudspeaker

- > Wi Fi connected.
- > For broad audience coverage
- > Point source radiation with smooth polar response
- > 100W integrated amplifier
- > Advanced DSP, factory and user presets
- > Psychoacoustics dynamic filters
- > Flat amplitude and phase response
- > Microphone stand pole mount + 3 rigging points
- > Optional multifunctional bracket

Usable bandwidth (-10dB)	55 Hz to 20 kHz
Maximum peak SPL at 1m	112 dB SPL
Nominal coverage (-6dB)	120° axisymmetric
Components	1x 5" weatherproof transducer 1x 1" tweeter coaxially mounted
Amplifier	100W, 90V to 250V AC, Full protections
DSP	48kHz, 24 bits, 96 bits internal calculation, RS485, 8 integrated presets, unlimited PC presets
Cabinet	18mm birch plywood with internal braces.
Finish	Grey, impact resistant structured water coating
Protection grill	Black acoustically transparent perforated steel, 1.5mm thick, with internal dust protective foam
Connectors	2x mains Powercon linked
Classification	IP54
Rigging	3x M8 inserts 1x 3/8" pole mount Optional multifunctional bracket
Net unit weight	5.6 kg 12.3 lb
Gross weight, packed	13 kg 29 lb (Carton including two cabinets)

Drawings mm [inches]

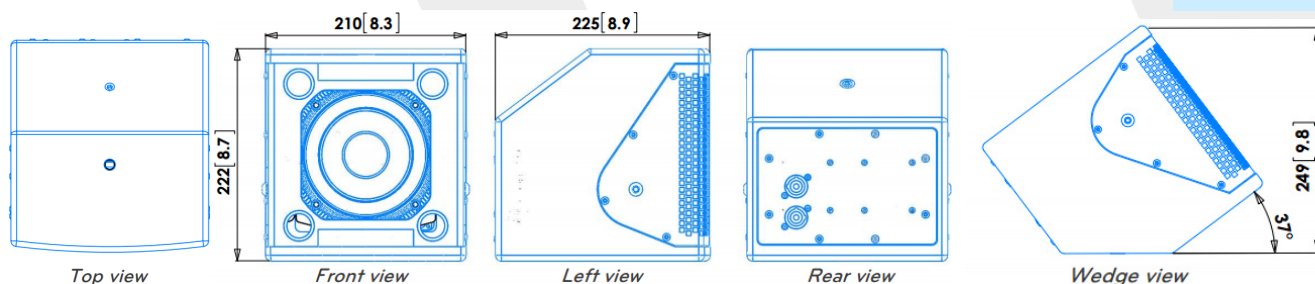

ARPHONIA
COLLECTION